



EVOTECH®
P E R F O R M A N C E

Kawasaki Z900 RS
Radiator Guard


Installation Instructions





Kit Contents PRN013911

- Ⓐ 2 x Rubber Bungs



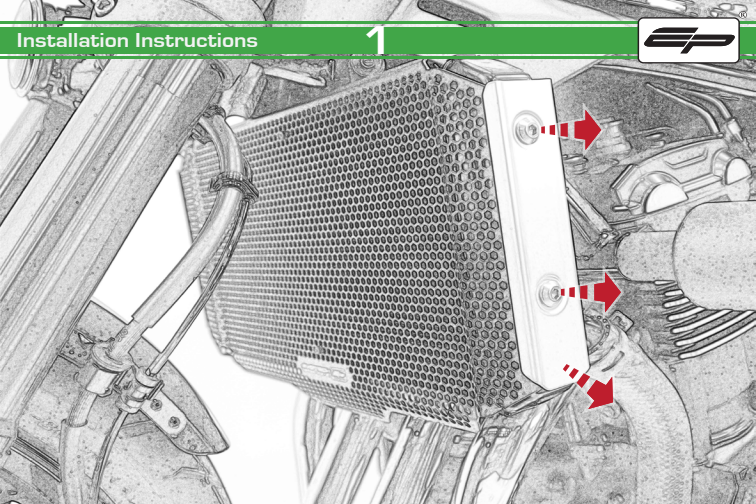


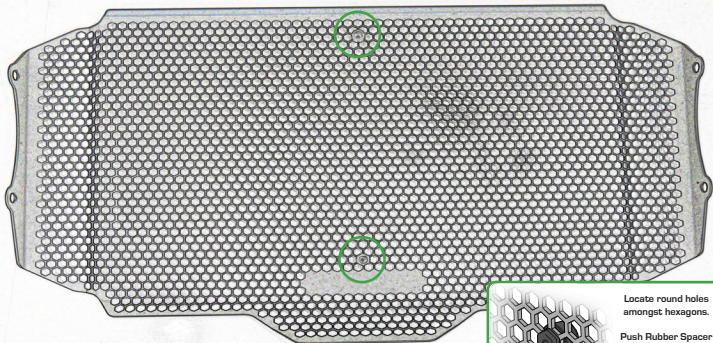


Locate round holes amongst hexagons.

Push Rubber Spacer through from the back of the guard so Hexagonal shape sits on the front face

The inset diagram shows a close-up of a single hexagonal hole in the mesh. A black rubber spacer is being pushed through the hole from the back side. A green arrow points to the left, indicating the direction of the spacer's movement. The spacer is a cylindrical component with a hexagonal-shaped protrusion on its front end.

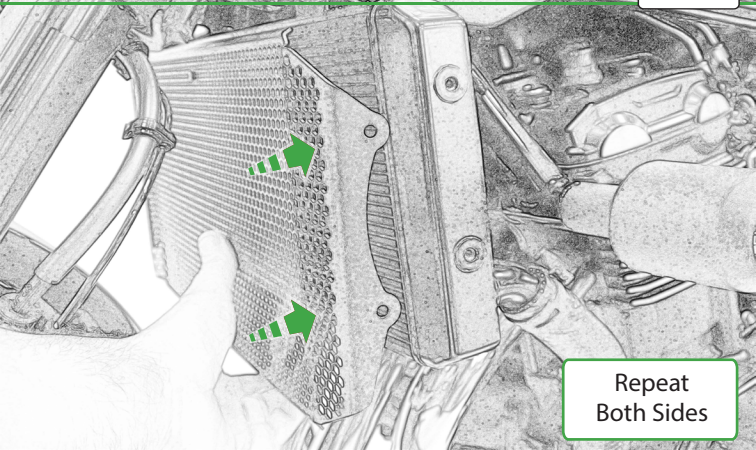

Repeat
Both Sides

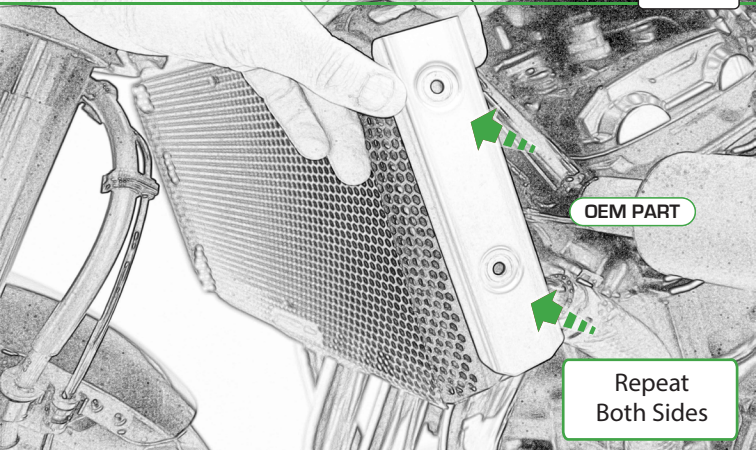

OEM PART

Repeat
Both Sides



OEM PART



OEM PART

Repeat
Both Sides



ESSENTIAL CHECKS

It is recommended that periodic inspections are made to ensure that dirt and debris have not become trapped between the guard and the radiator/oil cooler. Such dirt and debris would reduce the cooling efficiency of the radiator/oil cooler.

It is recommended that periodic inspections are made to ensure that all fixings are fully tightened.



EVOTECH®
P E R F O R M A N C E

www.evotech-performance.com