




Thank you for purchasing a ZTechnik product. Read these instructions carefully and thoroughly before beginning work. Dealers if installing this windshield for a customer please give them this manual. It contains information needed to properly maintain and use this product.



Attention: Special notes and cautionary measures which can prevent damage to the accessory or motorcycle.



Note: Tips for facilitation of operation, control and adjustment, as well as maintenance work.



TOOLS REQUIRED:
3mm Allen Wrench



Right and left side of motorcycle is determined while sitting on the bike.

PARTS LIST

Index	Description	Qty.
1	VStream Windscreen, Quantum Coated Lexan® polycarbonate	1
2	Compression Limiters	4

INSTALLATION




Retain all fasteners, as they will be reused. To facilitate reassembly, note the orientation of Covers and Bracket as you remove them in steps 1 and 2.

1. Carefully remove the two covers on outside of stock windshield.
2. Remove the four screws that hold the bracket and stock windscreen in place. Store stock windscreen it will not be reused.
3. Place your VStream Windscreen into position and install to motorcycle using the original screws, Compression Limiters (one Compression Limiter into each hole on wind-screen), brackets and covers.
5. Tighten the bolts firmly. Do not over tighten. **(3mm Allen Wrench)**

MAINTENANCE

To clean the screen, wash with a clean soft cloth, plenty of warm water and if necessary, a non-abrasive soap such as dishwashing liquid. Flannel or soft chamois make good cleaning cloths. **Paint, glue residue or grease removal:** Moisten cotton with Naphtha or Turpentine followed by a wash as above. National Cycle Shield Wash™ makes a good daily cleaner and comes with a handy travel size bottle. N1401 Shield Wash is safe for helmet visors.

Do not clean polycarbonate in hot sun or high temperatures. Do not clean the screen with glass cleaners. Do not use rain protective products on the screen other than National Cycle brand Rain Zip® (Part No. N1410). Do not allow brake fluid, alcohol, or strong solvents to contact the screen.

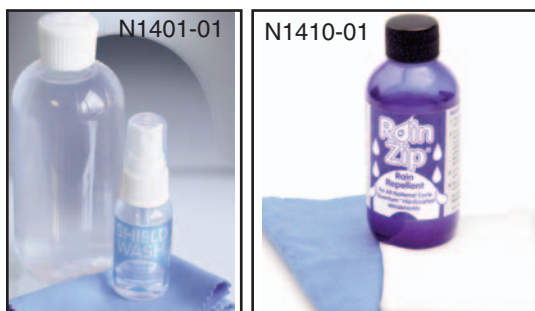

WARNING

Never ride your motorcycle with loose accessory mounting hardware. Check the hardware for tightness regularly.

Today's motorcycles are built with enough frame rigidity to withstand the moderate loads imposed on them by the foreseeable addition of an accessory(ies). If an accessory(ies) adversely affects your motorcycle's stability, immediately remove the accessory(ies). Do not ride a motorcycle that exhibits unsafe handling traits.

Have experienced service personnel correct any problem before riding with the accessory(ies) installed. For further questions concerning handling problems associated with an accessory(ies), contact your dealer, motorcycle manufacturer, or accessory manufacturer.



ZTechnik 3-Year Limited Warranty

Register your windshield on Line at: www.ZTechnik.com

ZTechnik hereby warrants to the original registered owner of a ZTechnik polycarbonate windshield for a period of three years from the date of purchase against breakage. This limited warranty is expressly limited to the replacement of the polycarbonate windscreen. This limited warranty does not include scratches, coating failure, cosmetic wear and tear, replacement of hardware, or any consequential damages or expenses including labor cost of installation, removal and/or replacement, inconvenience, inbound freight expenses or damage to any other component of the motorcycle or any other accessories. Certain chemicals, generally known as acidic hydrocarbons, are known to cause polycarbonate damage and will not be covered under this limited warranty. Please refer to the cleaning instructions supplied with all ZTechnik windshields.

Visit www.ZTechnik.com for further details or call or write ZTechnik / PO Box 158 / Maywood, IL 60153 / 708-3430400

ZTechnik PO Box Maywood, IL 60153-0158 USA

708-343-0400 / Fax: 708-343-0625 / www.ZTechnik.com / e mail: info@ZTechnik.com

©2006 National Cycle, Inc.

Page 2 of 2

10-118525-000 09/08 Rev. B 10/10